

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number
WO 03/058834 A1

(51) International Patent Classification⁷: **H04B 1/40**

(21) International Application Number: PCT/IB02/05370

(22) International Filing Date: 9 December 2002 (09.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02075094.9 11 January 2002 (11.01.2002) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor: **VAN DER ZWAN, Eric, J.** (deceased).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEENAERTS, Dominicus, M., W.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA

Eindhoven (NL). **PHILIPS, Kathleen, J., P.** [BE/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **BERGVELD, Hendrik, J.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HUISKEN, Josephus, A.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **DUIJVESTIJN, Adrianus, J.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: METHOD FOR PROVIDING CLOCK SIGNALS TO TRANSCEIVER CHIP AND TRANSCEIVER CHIP

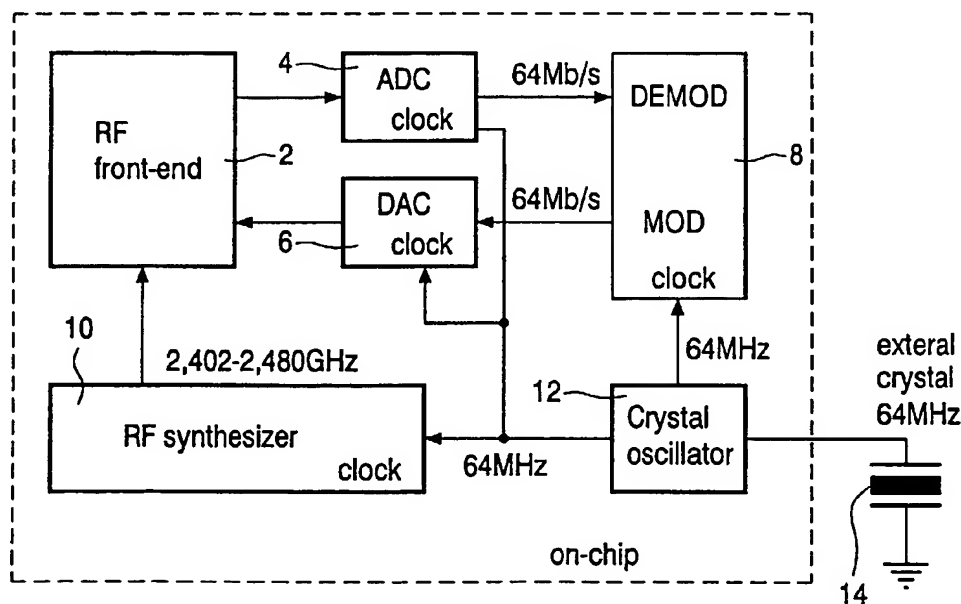

(57) Abstract: In a method of the invention for providing clock signals to a mixed signal telecommunication chip having a communication signal in a communication signal band, said clock signals comprise a central clock frequency signal and sub-frequency signals which are multiples or divisions of said central clock frequency signal. The central clock frequency signal is selected such that the central clock frequency signal and the sub-frequency signals are located outside the telecommunication signal band. The a mixed signal telecommunication chip of the invention takes advantage of the above clock planning.